

Critical issues in the characteristics and assessment of China's water resources

Yu-hong Fei^{1,2}, Su-hua Meng^{1,3*}, Ya-song Li^{1,2}, Peng-wei Zhang⁴, Xi-lin Bao^{1,3}

¹ Institute of Hydrogeology and Environmental Geology, Chinese Academy of Geological Sciences, Shijiazhuang 050061, China.

² Fujian Provincial Key Laboratory of Water Cycling and Eco-Geological Processes, Xiamen 361000, Fujian, China.

³ Key Laboratory of Groundwater Contamination and Remediation, China Geological Survey (CGS) & Hebei Province, Shijiazhuang 050061, China.

⁴ College of Environmental Science and Engineering/Sino-Canada Joint R&D Centre for Water and Environmental Safety, Nankai University, Tianjin 300071, China.

Abstract: This study provides a comprehensive analysis of the concepts and assessment processes of water resources in China, focusing on the characteristics of water resources and variations in water cycle fluxes. It reveals that the distribution of water resources in China is uneven, with more south and less north, and human activities have led to a decline in water resources, particularly in northern arid and semi-arid regions. Further analysis shows that duplicated measurements of surface water and groundwater significantly affect water balance calculation and water resource assessments, serving as a crucial factor guiding water resource development and utilization. The study also finds that consistency correction of runoff series is insufficient to meet the requirements of accurate water resource assessment. It is urgent to strengthen fundamental research in hydrology and hydrogeology, and to establish a dynamic assessment system for the efficient management and rational use of surface water and groundwater in the current changing environment.

Keywords: Surface water resources; Groundwater resources; Assessment concepts; Duplicated measurement; Restoration measurement

Received: 12 Feb 2024/ Accepted: 20 Aug 2024/ Published: 06 Dec 2024

Introduction

Water resources refer to the annually renewable amount of water in the water cycle (Chen et al. 2002; Liu and Chen, 2001). They are part of natural resources generated through the water cycle that includes precipitation, surface runoff, groundwater flow, and evaporation, all undergoing annual renewal. Influenced by precipitation, water resources exhibit both interannual and seasonal dry-wet variations. Human activities, such as river regulation projects, reservoir construction, and well drilling for water extraction, affect the natural convergence of the water cycle and alter the state

of surface runoffs and groundwater flows. This leads to the spatial and temporal redistribution of water resources. Water resources encompass surface water and groundwater, which interact through recharge and discharge.

In the late 1960s, many countries began to pay attention to water resources and conducted national-level assessments. For example, the United States completed two National Water Resources Assessments in 1968 and 1978, respectively, establishing the initial methods and technologies for Water Resource Assessment (WRA) based on hydrological and statistical theories. In 1988, the United Nations Educational, Scientific and Cultural Organization (UNESCO) and World Meteorological Organization (WMO) jointly developed *Water Resources Assessment – Handbook for Review of National Capabilities*, which was later revised in 1997. This handbook defined WRA as "the determination of the sources, extent, dependability, and quality of water resources to assess the possibility for utilization and control". It also promoted the convergence of WRA methods among different

*Corresponding author: Su-hua Meng, E-mail address: meng-suhua@mail.cgs.gov.cn

DOI: 10.26599/JGSE.2024.9280033

Fei YH, Meng SH, Li YS, et al. 2024. Critical issues in the characteristics and assessment of China's water resources. Journal of Groundwater Science and Engineering, 12(4): 463-474.

2305-7068/© 2024 Journal of Groundwater Science and Engineering Editorial Office This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0>)

countries and significantly advanced the process of WRA. During the International Hydrological Decade (IHD) in the 1980s, water resources research was a primary focus, evolving in subsequent phases to address sustainable water resources development in a changing environment. The IHD also emphasized hydrology and water resources development in a vulnerable environment, water interactions, systems at risk, and social challenges. These established research themes, led by UNESCO and involving countries worldwide, reflect the evolving trends in international water resources research (UNESCO, 2022).

Water Resource Assessment (WRA) encompasses the evaluation of the quantity, quality, and utilization of water resources. This paper specially focuses on the assessments of quantity. WRA relies on statistics, hydrology, and water balance theory. Methods for surface water resources assessment include contour line mapping, gauging station representation, neighboring station comparison, and precipitation-runoff correlation techniques. The assessment of groundwater resources involves establishing water balance equations based on groundwater recharge and discharge to calculate regional groundwater resources (Zuo et al. 2008). As socio-economic development progresses, there is increasing demand for more accurate and timelier WRAs. New technologies and methods, such as numerical simulations, artificial neural networks, isotope hydrology, GIS, and RS are widely applied in WRA. For example, a GIS platform based on ArcGIS was developed for the Ningxia Water Resources Quantity Assessment System (Chen et al. 2022). Additionally, RS and DEM were used to automate contour lines generation, overcoming the problem of low accuracy in WRA in the complex terrains of Qinghai Province (Sun and Li, 2022). Based on the big data platform of Ministry of Water Resources of China (MWR), a dynamic WRA framework was established, incorporating data collection, standardization, data warehouse, and algorithm model interfaces to support complex WRA tasks (Zhang and Zhan, 2021). Distributed hydrological models provide a new method for WRA during sub-rain-fall events (Xu et al. 2023).

In June 1979, China initiated the "National Comprehensive Survey and Assessment of Water Resources and Research on Rational Utilization" as part of the "Agricultural Natural Resources Survey and Agricultural Zoning" (Lin, 1980). Special research on water resources in North China was also launched during the national Sixth Five-

Year and Seventh Five-Year Science and Technology Breakthrough Program. These research achievements laid the foundation for WRA concepts and established assessment methods. China has conducted three systematic WRAs: The first using data series from 1956 to 1979, the second from 1956 to 2000, and the third from 1956 to 2016. The first two assessments were jointly completed by the MWR and the Ministry of Natural Resources (previous Ministry of Geology and Mineral Resources). The latter focused on conducting aquifer system surveys and proposed plans for groundwater development and utilization, while the MWR primarily monitored, investigated, and assessed surface water resources. This included analyzing the relationships between surface water and groundwater recharge and discharge, ultimately leading to water resources planning recommendations. Since 1997, the MWR has annually compiled *China Water Resources Bulletin* to assess water resources for the current year. With recent institutional reforms, responsibilities for water resources surveys and rights confirmation, registration, and management have been transferred to the Ministry of Natural Resources. In recent years, the department has explored and implemented water resources survey and monitoring practices, establishing a preliminary system for water resources survey and monitoring (Li et al. 2022).

In conclusion, China has made significant progress in WRA and utilization. This paper provides a comprehensive analysis of different methods and processes of WRA across different periods. It reveals that assessing only the total water resources may overlook the potential of groundwater resources. Moreover, consistency correction of runoff series in changing environments poses challenges to ensuring the accuracy of the results, ultimately affecting water resources development and utilization. This article discusses these two key issues, which hold significant implications for national natural resources planning and efficient water resource utilization.

1 Characteristics of water resources development and utilization

In China, water resource development has evolved from demand-driven approach to one that emphasizes research and establishment of WRA concepts, employing advanced scientific technologies and methods for water resource management and utilization.

(1) Dominance of water supply: Integrated

water resources development system combining reservoir, diversion, and extraction

After the founding of the People's Republic of China in 1949, large-scale construction of reservoirs, river channel improvements, and the development of water supply systems began. It is estimated that from 1949 to 1978, the number of dams over 30 meters in height increased from 21 to 3,651, with a total storage capacity reaching approximately $2,989 \times 10^8 \text{ m}^3$. From 1978 to 2000, the construction of water supply projects significantly accelerated. By 2020, China had built 98,566 reservoirs with a total capacity of $930.6 \times 10^9 \text{ m}^3$, capable of controlling 29.4% of the annual river runoff in the country. The effective irrigated area reached $691.61 \times 10^9 \text{ m}^2$ (Ministry of Water Resources, 2021). The development of water regulation projects also led to substantial growth in the number of wells. The peak period for groundwater wells lasted from the late 1960s to the early 1980s, with 114,400 mechanical and electric irrigation wells in 1961, 2.691 million wells in 1980 (Ministry of Water Resources, China, 2009), 4.37 million wells in 2006 (Ministry of Water Resources, 2007), and 5.173 million wells in 2020 (Ministry of Water Resources, 2020).

China's water resource utilization¹ increased from $103.1 \times 10^9 \text{ m}^3/\text{a}$ in 1949 (Ministry of Water Resources, 2009) to $443.7 \times 10^9 \text{ m}^3/\text{a}$ in 1980 (Hu and Wang, 2016), reaching $618.34 \times 10^9 \text{ m}^3/\text{a}$ in 2013 and relatively stabilizing to $599.82 \times 10^9 \text{ m}^3/\text{a}$ in 2022. Agriculture accounts for the largest proportion of water resource utilization. Before 1980, agricultural water use made up 92.5% of total water consumption, which later decreased to 77.0% between 1980 and 2000, and furthered to 63.3% from 2000 to 2022 (Fig. 1) (Ministry of Water Resources, 1997–2022). Groundwater extraction is the primary water supply source in

northern China. With more and more mechanical wells installed in the area, extracted groundwater has significantly increased. For example, groundwater extraction in the Beijing-Tianjin-Hebei Plain was $11.283 \times 10^9 \text{ m}^3/\text{a}$ in the 1970s (Zhang et al. 2009), increasing to $15.922 \times 10^9 \text{ m}^3/\text{a}$ from 2000 to 2010 (Yang et al. 2021). However, with the implementation of groundwater over-exploitation controls and the South-to-North Water Diversion Central Route Project, groundwater extraction has significantly decreased, dropping to $9.697 \times 10^9 \text{ m}^3/\text{a}$ in 2019. As a result, shallow groundwater levels in urban areas in western mountainous regions and deep groundwater levels in urban areas of central and eastern regions have rebounded (Yang et al. 2021).

(2) Exploration of WRA concepts: Formation of Basin-level WRA System

Before the 1980s, China's understanding of water resources was primarily focused on analyzing surface runoff and calculating aquifer storage. To support this, river hydrological stations and groundwater monitoring networks were established to systematically monitor river runoff, river water quality, sediment content, precipitation, evaporation, groundwater levels, and groundwater quality. This monitoring data was compiled annually, with various regional precipitation, runoff, and water level contour maps, as well as regional aquifer distribution maps, being produced. Publications such as the *China Hydrologic Atlas* (China Institute of Water Resources and Hydropower Research, 1963) and the *Hydrologic and Geological Atlas of the People's Republic of China* (Institute of Hydrogeology and Environmental Geology, CAGS, 1979) were released during this period.

In the 1970s, due to human interference in the water cycle, surface runoff decreased and overall groundwater levels declined, even under the same

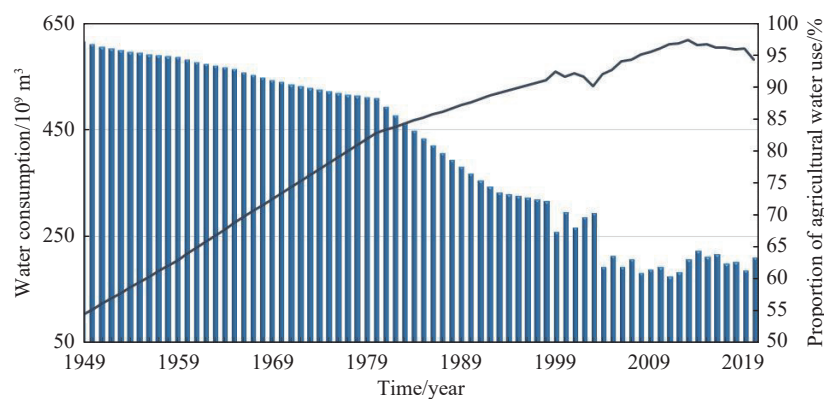


Fig. 1 Variations of China's water resources utilization and the proportion of agriculture water use

¹The WRA data in this paper does not include those in Taiwan Province, Hong Kong SAR, and Macau SAR.

precipitation conditions. This led to the formation of groundwater depression cones in some areas and caused many rivers in northern China to dry up for entire years. For example, the Haihe River Basin experienced approximately 300 dry days annually from 1980 to 2003 (Zhang et al. 2009; Fei et al. 2001). In response to these challenges, China urgently needed to determine the available water supply and thus proposed the concept of WRA. Through groundwater balance experiments (Zhang, 1988), exploration of the coordination and balance between surface water and groundwater recharge and discharge (Fan, 1982), and establishment of WRA methods and theoretical systems (Chen et al. 1982; Chen, 1982), *A Guide to Water Resources Assessment* (SL/T238-1999) was developed to guide national WRA. China's WRAs are organized according to river systems and divided into 10 major basin regions, or 10 first-class regions. These regions include four in the south: Yangtze River Basin, Southeast Rivers, Pearl River Basin, and Southwest Rivers; and six in the north: Songhuajiang River Basin, Liaohe River Basin, Haihe River Basin, Yellow River Basin, Huaihe River Basin, and Northwest Rivers (Ministry of Water Resources, 2022).

(3) Construction of rational water resource utilization models: Achieving Cross-Basin water diversion and integrated management of surface water and groundwater

Monitoring and calculating available surface water and groundwater supplies have revealed that the water supply capacity in many regions of China cannot meet the demand required to drive economic development, particularly in the north. Statistics show that before 2000, China's average water shortage was $53.6 \times 10^9 \text{ m}^3$, including approximately $30 \times 10^9 \text{ m}^3$ for agricultural use. Water withdrawals from river channels has reduced ecological water use, resulting in a shortfall of around $13.2 \times 10^9 \text{ m}^3$. This water scarcity has severely affected industrial and agricultural production, and urban and rural livelihoods in regions such as the Tarbagatay Basin, the northern slopes of the Tianshan Mountains, and the Turpan-Hami Basin in Xinjiang, the Heihe River Basin, the Shiyanghe River Basin, the Ordos Basin, the Guanzhong Plain, the North China Plain, the Shandong Peninsula, the northern part of the mid-reach of Huai River, and the Liaohe River Basin (MWR General Institute of Water Resources and Hydropower Planning and Design, China, 2010). The main reasons for the water supply-demand conflict are the arid climate and increased human water consumption. The former is mainly manifested in

the mismatch between low rainfall in spring and crop water needs, while the latter is driven by the growth of industry and agriculture and population increase.

The primary means of addressing this conflict is to increase groundwater extraction and implement cross-basin water diversion projects. For example, in the 1960s and 1970s, groundwater extraction in northern China increased significantly. Shallow groundwater and deep confined water were extracted in parallel, reaching well depths of up to 400 meters. The Luanhe-Tianjin Water Diversion Project, which started operation in 1983, is an urban water supply project that transfers water from the Luanhe River in Hebei Province to Tianjin. This project combines new canal and natural river channels, transferring water through open channels over a distance of 200 km, stretching from the New Yongdinghe River to the Haihe River via new irrigation channels and the North Canal. The first phase of the South-to-North Water Diversion Central Route Project, which was fully operational in 2014, originates from the Danjiangkou Reservoir on the Hanjiang River in the Yangtze River Basin. It extends 1,277 km with open channel water transfer, benefiting Henan, Hebei, Beijing, and Tianjin by alleviating water shortages in North China. By the end of 2023, the project had transferred cumulative total of $60.6 \times 10^9 \text{ m}^3$ of water (Tan, 2023).

2 Water resources distribution and variations

The following section presents data and diagrams in relation to water resources quantities and variations, duplicated measurement, restoration measurement, and water balance sources from the *Investigation and Evaluation of Chinese Water Resources and their Exploitation and Utilization* (MWR General Institute of Water Resources and Hydropower Planning and Design (GIWP), China, 2014).

(1) Water resources distribution

According to the assessment of data series from 1956 to 2000, China's average annual water resources amount to $2,841.2 \times 10^9 \text{ m}^3$, with surface water resources totaling $2,738.8 \times 10^9 \text{ m}^3$, groundwater resources $821.8 \times 10^9 \text{ m}^3$, and duplicated measurement $719.4 \times 10^9 \text{ m}^3$. Northern China's total resources amount to $526.7 \times 10^9 \text{ m}^3$, while southern China's total is $2,314.5 \times 10^9 \text{ m}^3$. The Water Yield Modulus in southern China greatly exceeds that of the north (Table 1).

Northern China's total water resources account for only 23% of those in southern China. In the semi-arid and arid regions of northern China, surface runoff is minimal and most water yield replenishes groundwater. As a result, groundwater resources constitute a higher proportion in the north (47%) compared to south (25%). In water-scarce regions like the Haihe River Basin, groundwater resources account for 64%, while surface water resources contribute 58%, and duplicated measurement 22%. In the Yellow River Basin, groundwater resources constitute 52% of the total, surface water resources 84%, and duplicated measurement 36% (Fig. 2).

(2) Changes in water resources quantity and causes of change

In the semi-arid and arid regions in northern China, human activities have significantly impacted the water cycle, leading to a decline in water resources. A comparison between the assessments of two time series (1956–1979 and 1956–2000) reveals a reduction in overall water resources. Surface water resources decreased from $450.7 \times 10^9 \text{ m}^3/\text{a}$ to $437.8 \times 10^9 \text{ m}^3/\text{a}$, a decline of 2.9%. Groundwater resources decreased from $255.1 \times 10^9 \text{ m}^3/\text{a}$ to $245.8 \times 10^9 \text{ m}^3/\text{a}$, a decline of 3.6%. Northern China has undergone more significant declines compared to the south. Water resources, surface water resources, and groundwater resources in river basins such as the Haihe River, Yellow River, and Liaohe River decreased by 12.1%, 25%, 11.4%; 3.3%, 8.2%, 7.2%; 13.7%, 16.2%, and –4.5%, respectively. In contrast, the water-abundant south-

ern China has seen minimal variations, with slight increases in the total volume and surface water resources in the Yangtze River Basin (Fig. 3).

The main causes of variations in surface water resources include large-scale water conservancy projects, soil and water conservation projects, and groundwater extraction. These projects alter regional conditions for surface water yield and convergence, subsequently affecting the hydrological processes in a basin. The construction and operation of reservoirs regulate surface runoff through water storage and discharge, thus altering the distribution of runoff throughout the year (Sun and Zhao, 2019; Yang et al. 2023). Afforestation, terraces, and fish-scale pits designed to conserve water and reduce soil erosion have a strong capacity to intercept and store surface runoff. Experiments indicate that in moderate rainfall condition, forested areas can reduce surface runoff by 60% to 80% compared to bare land (Zhang and Wang, 2017; Chen et al. 2005; Zuo et al. 2008). Changes in land use, such as urban development and transportation infrastructure construction, increase surface runoff and runoff modulus, heightening the risk of urban waterlogging (Song et al. 2014). Additionally, changes in the way of land use also alter the composition of water resources (Liu et al.). Human extraction of groundwater is a crucial factor influencing the variations in groundwater levels in semi-arid and arid regions (Fei et al. 2007; Meng et al. 2013).

(3) Characteristics of water balance

The water cycle initiated by precipitation includes

Table 1 Average annual water resources

Water resource Region	Precipitation (mm)	Surface water resources (10^9 m^3)	Groundwater resources (10^9 m^3)	Duplicated measurement (10^9 m^3)	Total water resources (10^9 m^3)	Water yield modulus ($10^4 \text{ m}^3/\text{km}^2$)
Northern China	328.2	437.8	245.8	156.9	526.7	8.7
Southern China	1,214.4	2,301	576	562.5	2,314.5	67.1
Total	649.8	2,738.8	821.8	719.4	2,841.2	30.0

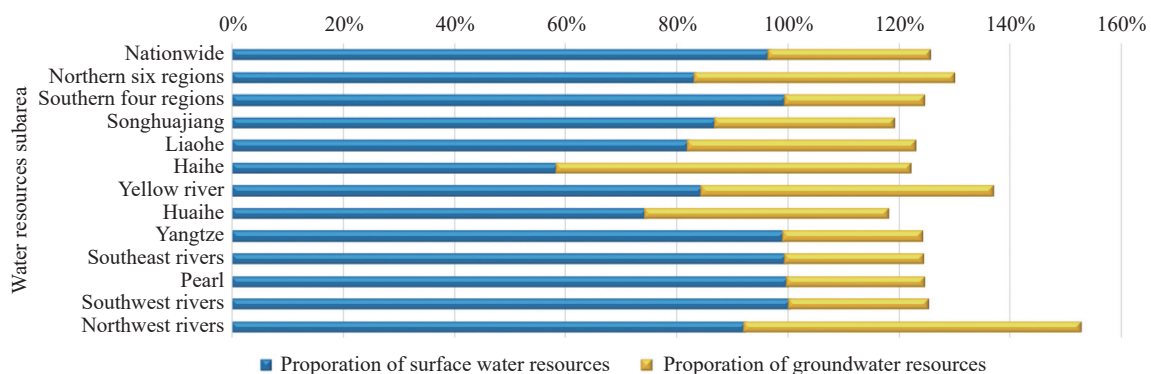


Fig. 2 Ratio of surface water and groundwater to total water resources

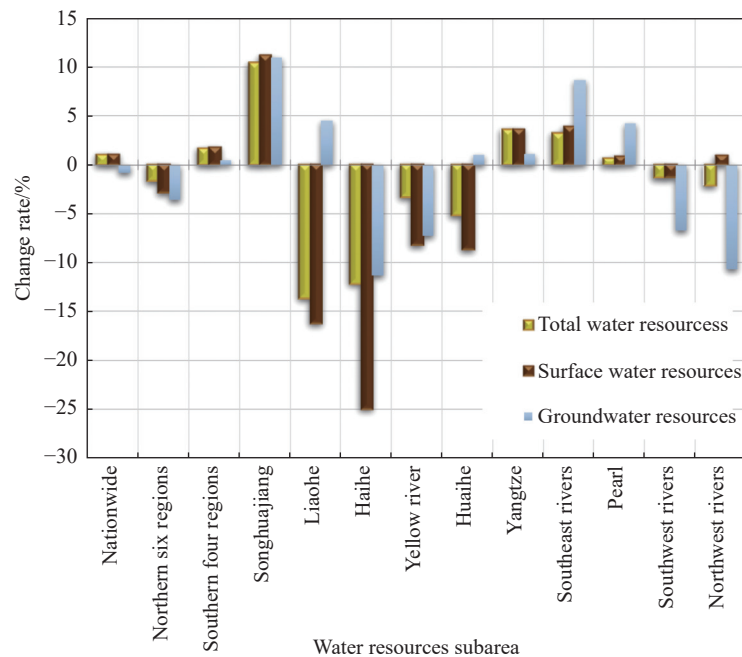


Fig. 3 Rate of change in water resources in different regions

three key components: Surface evapotranspiration, surface runoff, and infiltration that recharges groundwater, with the latter two contributing to the total water resources. Water that infiltrates underground is partially retained in the vadose zone, supporting plant growth (and is not considered here), while another portion flows as interflow and groundwater runoff into rivers, becoming part of river runoff. A portion of infiltrated water re-evaporates into the atmosphere, and the remainder percolates deeper to form groundwater.

China's water resources assessments and water balance studies show that 54% of precipitation is lost to surface evapotranspiration, while 46% contribute to total water resources. Of this, 33% forms surface runoff, and 13% infiltrates to recharge groundwater. In northern regions, 73% of precipitation becomes surface evapotranspiration, with only 27% contributing to water resources—59% of which is surface runoff, 24% is river base flows, 8% is lost to phreatic evaporation, and 9% to underflows. In southern regions, 45% of precipitation becomes surface evapotranspiration, while 55% contributes to water resources—75% of which is surface runoff, 24% is river base flows, and only 1% is lost to phreatic evaporation (Fig. 4).

3 Key issues in quantitative Water Resources Assessment (WRA)

In WRA, the quantities of total water resources, surface water resources, and groundwater resources

are essential for the rational development and utilization of water resources. The quantity of total water resources is defined as the algebraic sum of the quantity of surface water resources, groundwater resources, and the non-duplicated measurement within a basin or region (*Standard for Essential Technical Terminology and Symbol in Hydrology* (GB/T 50095—2014)). Surface water resources refer to the dynamic water volumes formed by local precipitation in surface water bodies such as rivers, lakes, and glaciers, which can be updated annually. Groundwater resources refer to the dynamic water volumes that are hydraulically connected to local precipitation and surface water bodies, participating in the water cycle and also subject to annual updates (commonly referred to as shallow groundwater resources). The WRA must address the following two key issues.

(1) Duplicated measurement: Significant volume for groundwater development

The water cycle involves an exchange between surface water and groundwater, resulting in a duplicated water volume measurement, commonly referred to as "duplicated measurement". This volume includes river base flows formed by precipitation infiltration that replenishes groundwater discharge and groundwater recharge caused by surface water infiltration. It is an indispensable component of both surface water and groundwater resources. When calculating the total quantity of water resources, the duplicated measurement is subtracted from the sum of surface water resources and groundwater resources. Conversely, the

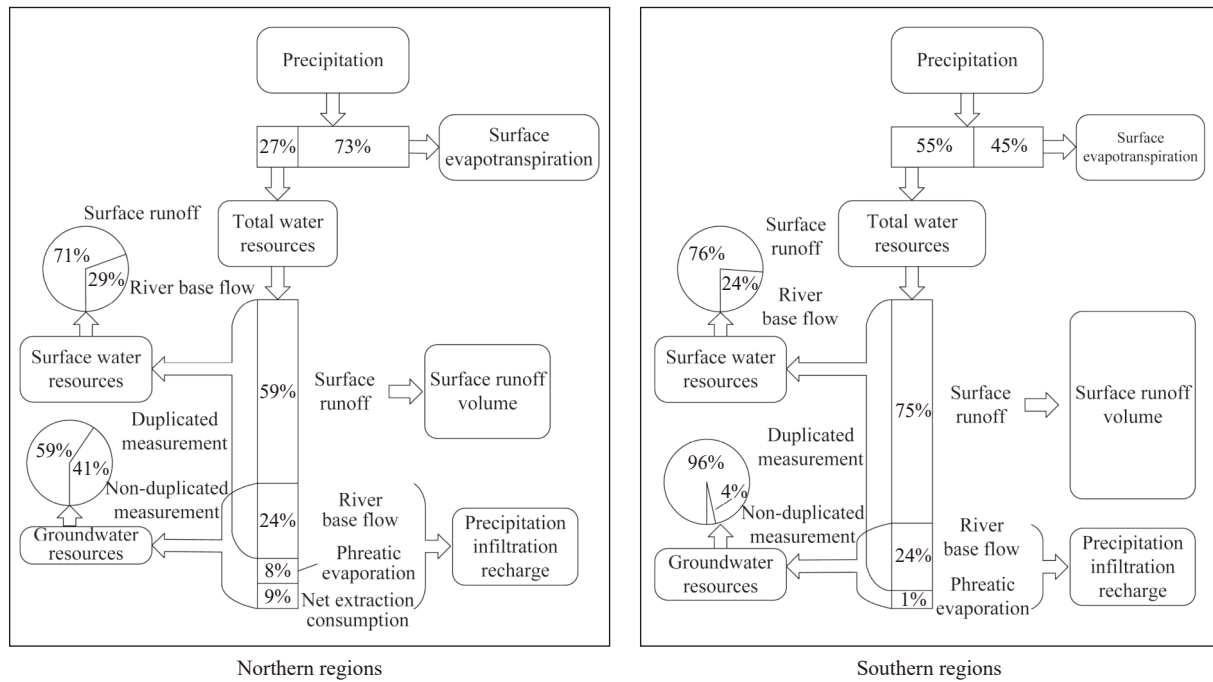


Fig. 4 Water balance model

portion of groundwater resources replenished by precipitation infiltration without being discharged via river base flows is termed "non-duplicated measurement". The total water resources quantity is calculated as the sum of surface water resources and the non-duplicated measurement.

The relationship between duplicated measurement, non-duplicated measurement, and the quantity of total water resources is as follows:

$$W = R + Q - D \quad (1)$$

$$W = R + P_r - R_g \quad (2)$$

Where: $(P_r - R_g)$ is non-duplicated measurement. Combining Equations (1) and (2) will have:

$$Q = D + (P_r - R_g) \quad (3)$$

Where: W is quantity of total water resources; R is quantity of surface water resources; Q is quantity of groundwater resources; D is duplicated measurement; P_r is precipitation infiltration volume; and R_g is river base flow volume. All units are in cubic meters (m^3).

Equation (3) indicates that the sum of the duplicated measurement and non-duplicated measurement equals the total quantity of groundwater resources.

Duplicated measurement reflects the degree of hydraulic connection between surface water and groundwater, while non-duplicated measurement is proportional to the extent of groundwater development and utilization (Kang, 2022; Pan and Tong,

2013). According to data from 1956 to 2000, duplicated measurement accounts for 98% of groundwater resources in southern China, while non-duplicated measurement accounts for only 2%. In northern China, non-duplicated measurement constitutes 36% of groundwater resources, with duplicated measurements at 64%. In the Haihe River Basin, which faces water shortages, non-duplicated measurement reaches as high as 66% (Fig. 5).

Duplicated measurement represents existing water quantities within the water cycle, which can be obtained through experiments, monitoring, and calculations. Its quantity and spatiotemporal distribution are more suitable for the resources utilization and are crucial supporting volumes for both in-stream and off-stream ecosystems. This measurement is an important factor in guiding the development and utilization of water resources. Developing surface water resources can reduce groundwater recharge, while exploiting groundwater resources diminishes phreatic evaporation, river base flows, and underflows, but increases precipitation infiltration to recharge the groundwater. Non-duplicated measurement cannot be directly calculated but is derived after determining the quantity of groundwater resources and duplicated measurement. The quantity of surface water resources and non-duplicated measurement may not accurately reflect the total quantity of water resources, which can obscure the role of duplicated measurement in water resource development and utilization plan-

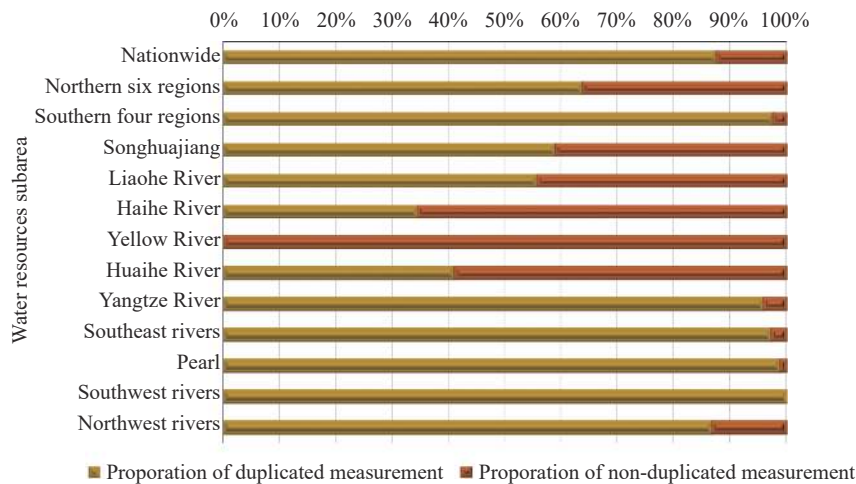


Fig. 5 Ratios of duplicated and non-duplicated measurement in groundwater resources

ning, leading to an overemphasis on surface water resources and the effects of water interception and storage (Li, 2023).

(2) Consistency correction of runoff series: Distorting WRA results

Water Resources Assessment (WRA) aims to inform water resource planning and predict future available water resources. According to statistical theory, the conditions under which runoff occurs in random series should remain consistent over time. However, hydrological series are no longer consistent from year to year due to climate and human activities, including changes in land surface, in-stream water diversion, and groundwater extraction. For example, the measured runoff of the Haihe River decreased by 30% to 70% from 1950–1969 to 1970–2010 (Zhang et al. 2017), with human activities responsible for over 60% of the total reduction (Zhang et al. 2007). The measured runoff in the Liaohe River and Songhuajiang River has shown a non-significant decreasing trend since the 1970s (Wang et al. 2017; Tian and Wang, 2018). The Yellow River, Yangtze River, and Pearl River have experienced reduced runoff or seasonal variations (Liu et al. 2022; Zhou and Zhang, 2018; Chen et al. 2018).

To "eliminate" the impact of human activities, surface WRA employs a "measure-restore-correct" approach to restore measured water cycle fluxes to their natural states, a process known as consistency corrections. This involves two key steps: First, the annual runoff series are restored by converting measured annual runoff to natural annual runoff, accounting for surface water consumption variables such as agricultural irrigation, industrial and domestic use, inter-basin water imports and exports, river channel floodwater, and reservoir storage. Second, the annual runoff series are corrected, also known as "restoration". After

identifying the turning point on the double accumulation correlation graph of annual precipitation and natural annual river runoff, where significant changes are evident, the graph is divided into two parts and the runoff before the turning point is then adjusted to be consistent with the subsequent period, following a certain proportion. Analysis reveals that as human activities intensify, significant changes occur in water cycle parameters, necessitating an increasing number of water cycle fluxes to be restored and corrected with growing restoration ratios. For example, in the area above the Guanting Reservoir on the Yongdinghe River, part of the Haihe River Basin, the restored series volume accounted for 31.3% of natural runoff between 1961 and 1970, 48.8% between 1971 and 1980, 67.5% between 1981 and 1990, and 62.6% between 1991 and 2000. In the area above the Huangbizhuang Reservoir on the Hutuohe River, another part of the Haihe River Basin, the restored volume accounted for 19.1% of natural runoff between 1961 and 1970, 28.1% between 1971 and 1980, 61.1% between 1981 and 1990, and 44.1% between 1991 and 2000 (Fig. 6).

The above methods are constrained by data limitation and subjective influences, leading to "restoration distortion" and "restoration failure". The long-term evolution of hydrological time series involves uncertainty, and "consistency correction" can only reflect changes in a specific period, making it difficult to accurately represent gradual hydrological processes or predict future changes in water resource series (Qiu, 2006). An effective way to address these challenges is to establish a dynamic WRA concept. With comprehensive monitoring data and advancements in Remote Sensing (RS), drones, and communication technologies, hydrological models can now enable dynamic, efficient, and scientific WRA and predic-

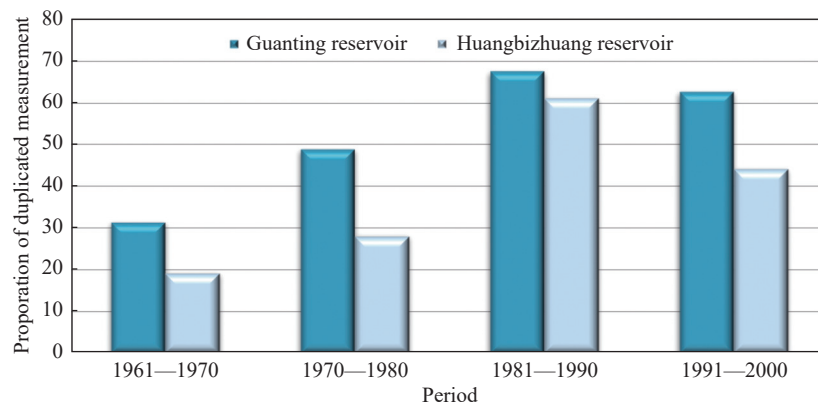


Fig. 6 Changes in the share of restored volume of Guanting and Huangbizhuang Reservoirs

tion. In China, well-established models include distributed hydrological models (Wang et al. 2008; Wang et al. 2023; Yi et al. 2024), surface water and groundwater coupled models (Xie et al. 2002; Wang and Lu, 2020), and the WEP-L model which is based on watershed water cycles (Jia et al. 2006).

4 Conclusion

China's water resources are unevenly distributed across time and space, with arid and semi-arid northern regions experiencing scarcity and highly levels of utilization. Groundwater resources have supported local economic and social water use for decades, but the imbalance between supply and demand is becoming increasingly prominent. Establishing water balance-based WRA methods has provided a solid scientific basis for water resource management and development in China. Analysis of WRA over different periods reveals a declining trend in water resources. The duplicated measurement of surface water and groundwater plays a significant role in water balance calculations and WRAs, which can be used to guide the development and utilization of water resources. However, traditional series consistency correction in surface water assessments is no longer sufficient.

Recent initiatives, such as the South-to-North Water Diversion Project, reduced groundwater extraction, and ecological water replenishment in river channels, are contributing to a cross-basin system aimed at rebalancing water resources. In the current changing environment, there is an urgent need to strengthen fundamental research in hydrology and hydrogeology, improve monitoring, and to establish a dynamic assessment system for the efficient management and rational use of surface water and groundwater.

Acknowledgements

This study was supported by China Geological Survey (DD20221773-3, DD20230459).

References

- Chen D, Zhang HT, Li MM, et al. 2022. Design and implementation of water resources evaluation system in Ningxia. *Water Resources Informatization*, 03: 72–77. (in Chinese) DOI: [10.19364/j.1674-9405.2022.03.013](https://doi.org/10.19364/j.1674-9405.2022.03.013).
- Chen JQ, Wang H, Yang XL, et al. 2002. Science of water resources. Beijing: Science Press. (in Chinese)
- Chen JN, Yao WY, Li M, et al. 2005. Analysis on the benefits of water and sediment interception under the conditions of different soil and water conservation measures in Qingjian River basin. *Water Power*, 31(6): 9–13. (in Chinese)
- Chen LH, Liu WF, Leng G, et al. 2018. Study on interannual and seasonal variation characteristics of runoff in the main stream of the Xijiang River. *South-to-North Water Transfers and Water Science & Technology*, 16(4): 74–81. (in Chinese) DOI: [10.13476/j.cnki.nsbdqk.2018.0099](https://doi.org/10.13476/j.cnki.nsbdqk.2018.0099).
- Chen MX. 1982. Development and utilization of groundwater resources in China. *Resources Science*, (2): 42–48. (in Chinese)
- Chen ZK, He WC, Ren GZ. 1982. Some problems in the investigation and evaluation of water resources in China. *Journal of China Hydrology*, (S1): 2–6. (in Chinese) DOI: [10.19797/j.cnki.1000-0852.1982.s1.001](https://doi.org/10.19797/j.cnki.1000-0852.1982.s1.001).
- China Institute of Water Resources and Hydro-

- power Research. 1963. Atlas of Chinese hydrology. Beijing: Science Press. (in Chinese)
- Fan XP. 1982. The mutual transformation relationship between groundwater and river water in the Shiyang River Basin and the evaluation of total water resources. *Journal of China Hydrology*, 1982(S1): 73–78. (in Chinese) DOI: [10.19797/j.cnki.1000-0852.1982.s1.014](https://doi.org/10.19797/j.cnki.1000-0852.1982.s1.014).
- Fei YH, Chen SE, Liu KY. 2001. Characteristics of inferior variation of water environment in Hutuohe River dried-up area. *Shuili Xuebao*, (11): 41–44. (in Chinese) DOI: [10.13243/j.cnki.slxb.2001.11.007](https://doi.org/10.13243/j.cnki.slxb.2001.11.007).
- Fei YH, Zhang ZJ, Zhang FE, et al. 2007. An analysis of the influence of human activity and climate change on water resources of the North China Plain. *Acta Geoscientica Sinica*, 28(6): 567–571.
- GB/T50095-2014. 2014. Standard for essential terminologies and symbols in hydrology. (in Chinese)
- Hu SY, Wang H. 2016. Water resources of China. Zhengzhou: The Yellow River Water Conservancy Press. (in Chinese)
- Institute of Hydrogeology and Environmental Geology, CAGS. 1979. Atlas of hydrogeology of the People's Republic of China. Beijing: China Cartographic Publishing House.
- Jia YW, Wang H, Qiu YQ, et al. 2006. General water resources assessment based on watershed hydrologic cycle model II : Applications in the Yellow River Basin. *Journal of Hydraulic Engineering*, 37(10): 1181–1187. (in Chinese)
- Kang CQ. 2022. Analysis on the spatial distribution characteristics and influencing factors of non-repetitive quantity of water resources in Shanxi Province. *Shanxi Hydrotechnics*, 01: 52–56. (in Chinese)
- Li WP, Zheng YJ, Wu AM, et al. 2022. Preliminary study on the construction of water resources investigation technology system in China. *Geomatics World*, 29(05): 28–34. (in Chinese)
- Li WP. 2023. Discussion on the recognition of surface water resources and groundwater resources duplication and the concept of water resources utilization. *Hydrogeology & Engineering Geology*, 50(01): 1–2. (in Chinese) DOI: [10.16030/j.cnki.issn.1000-3665.202209031](https://doi.org/10.16030/j.cnki.issn.1000-3665.202209031).
- Lin Y. 1980. The second national conference on agricultural natural resources survey and agricultural zoning work was held in Beijing. *Hydrogeology & Engineering Geology*, (5): 23–37. (in Chinese) DOI: [10.16030/j.cnki.issn.1000-3665.1980.05.007](https://doi.org/10.16030/j.cnki.issn.1000-3665.1980.05.007).
- Liu CM, Chen ZK. 2001. Evaluation of the current situation and development trends of water resources in China. Beijing: China Water & Power Press. (in Chinese)
- Liu CM, Wang KW, Wang G, et al. 2022. Analyzing the changes of streamflow and associated influencing factors in the Yellow River Basin from 1956 to 2016. *Yellow River*, 44(09): 1–5, 16. (in Chinese) DOI: [10.3969/j.issn.1000-1379.2022.09.001](https://doi.org/10.3969/j.issn.1000-1379.2022.09.001).
- Liu Q, Guo XD, Wang CQ, et al. 2023. Changes in groundwater resources and their influencing factors in Songnen Plain, China. *Journal of Groundwater Science and Engineering*, 11(3): 207–220. DOI: [10.26599/JGSE.2023.9280018](https://doi.org/10.26599/JGSE.2023.9280018).
- Meng SH, Fei YH, Zhang ZJ, et al. 2013. Research on spatial and temporal distribution of the precipitation infiltration amount over the past 50 years in North China Plain. *Advances in Earth Science*, 28(8): 923–929. (in Chinese)
- Ministry of Water Resources, People's Republic of China. 1997–2022. China water resources bulletin. Beijing: China Water & Power Press. (in Chinese)
- Ministry of Water Resources, People's Republic of China. 2009. Number of electromechanical wells and installed capacity. *China Flood & Drought Management*, S1: 192–193. (in Chinese)
- Ministry of Water Resources, People's Republic of China. 2009. Promote the beneficial and abolish the harmful, strong member of rich country—60 years of water conservancy in China. Beijing: China Water & Power Press. (in Chinese)
- Ministry of Water Resources, People's Republic of China. 2021. 2020 Statistic Bulletin on China Water Activities, 9–10. Beijing: China Water & Power Press. (in Chinese)
- MWR. 2010. General Institute of Water Resources

- and Hydropower Planning and Design (GIWP), China. National water resource synthesis plan. Beijing. (in Chinese)
- MWR. 2014. General Institute of Water Resources and Hydropower Planning and Design (GIWP), China. Investigation and evaluation of Chinese water resources and their exploitation and utilization. Beijing: China Water & Power Press. (in Chinese)
- Pan QM, Tong CL. 2013. Water resources changes of the upper and middle Yellow River in recent years. *Yellow River*, 35(09): 53–54. (in Chinese) DOI: [10.3969/j.issn.1000-1379.2013.09.017](https://doi.org/10.3969/j.issn.1000-1379.2013.09.017).
- Qiu YQ. 2006. Study on comprehensive assessment and evolution law of water resources. Ph. D. thesis. Beijing: China Institute of Water Resources & Hydropower Research. (in Chinese)
- Song XM, Zhang JY, Wang GQ, et al. 2014. Development and changes of urban hydrology in a changing environment: II: urban stormwater modeling and management. *Advances in Water Science*, 25(5): 752–764. (in Chinese) DOI: [10.14042/j.cnki.32.1309.2014.05.025](https://doi.org/10.14042/j.cnki.32.1309.2014.05.025).
- Sun XF, Zhao JK. 2019. Analysis on the runoff regulation of three gorges reservoir. *Journal of Water Resources Research*, 8(6): 557–566. (in Chinese) DOI: [10.12677/JWRR.2019.86063](https://doi.org/10.12677/JWRR.2019.86063).
- Sun YS, Li Y. 2022. Application of gird data in calculation of water resources quantity in water resources evaluation. *Journal of Anhui Agricultural Sciences*, 50(10): 185–189+198. (in Chinese) DOI: [10.3969/j.issn.0517-6611.2022.10.042](https://doi.org/10.3969/j.issn.0517-6611.2022.10.042).
- Tan Y. 2023. The middle route of the South-to-North Water Diversion Project has benefited 30.5 million people in Henan Province since it was officially opened nine years ago. *Henan Daily*, 12–23(04). (in Chinese)
- Tian L, Wang SJ. 2018. Analysis of the runoff change and main influencing factors in the Liaohe River basin. *Research of Soil and Water Conservation*, 1: 153–159. (in Chinese) DOI: [10.13869/j.cnki.rswc.2018.01.025](https://doi.org/10.13869/j.cnki.rswc.2018.01.025).
- UNESCO. 2022. IHP-IX: Strategic plan of the intergovernmental hydrological programme: Science for a water secure world in a changing environment, ninth phase 2022–2029.
- Wang XG, Hu J, Lü J, et al. 2017. Variation characteristics of annual runoff in the Songhua River basin from 1956 to 2014. *Soil and Water Conservation in China*, 10: 1–65, 72. (in Chinese) DOI: [10.14123/j.cnki.swcc.2017.0262](https://doi.org/10.14123/j.cnki.swcc.2017.0262).
- Wang JH, Lu CY. 2020. Studies on technical support system for comprehensive control of groundwater overexploitation in North China. *China Water Resources*, 13: 19–21, 225. (in Chinese)
- Wang YX, Hu TS, Wang JL, et al. 2023. Approach for water resources assessment based on runoff component investigation method and SWAT model. *Journal of Water Resources & Water Engineering*, 34(04): 54–65. (in Chinese) DOI: [10.11705/j.issn.1672-643X.2023.04.07](https://doi.org/10.11705/j.issn.1672-643X.2023.04.07).
- Wang ZJ, Yang F, Zhao JS, et al. 2008. New approach for water resources assessment based on distributed hydrological model. *Journal of Hydraulic Engineering*, 39(12): 1279–1285. (in Chinese) DOI: [10.13243/j.cnki.slxb.2008.12.006](https://doi.org/10.13243/j.cnki.slxb.2008.12.006).
- Xie XM, Guo HY, Tang KW, et al. 2002. Dual coupled model for integrated assessment of surface water and groundwater in North China Plain. *Journal of hydraulic engineering*, 12: 95–100. (in Chinese) DOI: [10.13243/j.cnki.slxb.2002.12.018](https://doi.org/10.13243/j.cnki.slxb.2002.12.018).
- Xu JX, Li YY, Pan XY, et al. 2023. Evaluation method of precipitation water resources based on multiple temporal and spatial scale coordination. *Journal of Hohai University (Natural Sciences)*, 51(01): 19–25. (in Chinese) DOI: [10.3876/j.issn.1000-1980.2023.01.003](https://doi.org/10.3876/j.issn.1000-1980.2023.01.003).
- Yang HF, Cao WG, Zhi CS, et al. 2021. Evolution of groundwater level in the North China Plain in the past 40 years and suggestions on its over-exploitation treatment. *Geology in China*, 48(4): 1142–1155. (in Chinese) DOI: [10.12029/gc20210411](https://doi.org/10.12029/gc20210411).
- Yang MN, Zhu L, Liu JT, et al. 2023. Influence of water conservancy project on runoff in the source region of the Yellow River and wetland changes in the Lakeside Zone, China. *Journal of Groundwater Science and Engineering*, 11(4): 333–346. DOI: [10.26599/JGSE.2023.9280027](https://doi.org/10.26599/JGSE.2023.9280027).

- Yi L, Chen FH, Han JB, et al. 2024. SWAT-based distributed hydrologic simulation and runoff prediction in the upper Golmud River watershed. *Journal of Salt Lake Research*, 1–11. (in Chinese)
- Zhang C, Zhan QZ. 2021. Research and practice of big data calculation framework for dynamic evaluation of water resources. *Water Resources Informatization*, 06: 29–33. (in Chinese) DOI: [10.19364/j.1674-9405.2021.06.006](https://doi.org/10.19364/j.1674-9405.2021.06.006).
- Zhang GH. 1988. On the feasibility of utilization of zero flux method to estimate the infiltration recharge to shallow groundwater in northern China. *Hydrogeology & Engineering Geology*, 2: 16, 31–33. (in Chinese) DOI: [10.16030/j.cnki.issn.1000-3665.1988.02.007](https://doi.org/10.16030/j.cnki.issn.1000-3665.1988.02.007).
- Zhang JY, Zhang SL, Wang JX, et al. 2007. Study on runoff trends of the six larger basins in China over the past 50 years. *Advances in Water Science*, 18(2): 230–234. (in Chinese) DOI: [10.14042/j.cnki.32.1309.2007.02.013](https://doi.org/10.14042/j.cnki.32.1309.2007.02.013).
- Zhang LR, He YH, Tang YP, et al. 2017. Analysis of runoff change trend and its attribution in Haihe River Basin. *Hydro-Science and Engineering*, 4: 59–66. (in Chinese) DOI: [10.16198/j.cnki.1009-640x.2017.04.009](https://doi.org/10.16198/j.cnki.1009-640x.2017.04.009).
- Zhang ZJ, Fei YH, Chen ZY, et al. 2009. Investigation and evaluation on groundwater sustained development in North China Plain. Beijing: Geological Publishing House.
- Zhou JJ, Zhang M. 2018. Effect of dams on the regime of the mid-lower Yangtze River runoff and countermeasures. *Journal of Lake Science*, 30(6): 1471–1488. (in Chinese) DOI: [10.18307/2018.0601](https://doi.org/10.18307/2018.0601).
- Zuo QT, Dou M, Ma JX. 2008. Water resources science tutorial. Beijing: China Water & Power Press. (in Chinese)